

Cellular Parametric Test

6113 Digital Radio Test Set

AEROFLEX
A passion for performance.



- Easy to use, fully integrated, soft key driven BTS test set
- Support for GSM850, GSM900, GSM1800 and GSM1900
- Comprehensive test of transmitter and receiver
- Options to control the major BTS types
- Manual and fully automatic testing
- Test sequences for full customization
- Optimized for installation and commissioning, routine maintenance, fault diagnosis, BTS refurbishment and production testing
- A-bis interface for full BTS control and bit error ratio (BER) measurements
- Two PC Card slots for data storage, field upgrades and software enhancements

The 6113 Digital Radio Test Set provides a wide range of test and measurement functions to enable fast manual or automatic testing of GSM850, GSM900, GSM1800 or GSM1900 Base Transceiver Stations (BTSs). Applications includes installation and commissioning, routine maintenance, fault diagnosis and final unit product testing.

A-BIS INTERFACE

In order to perform comprehensive, "real environment", stand-alone testing of a base station, the test set must be capable of controlling the BTS. The 6113 is unique in its ability to measure RF transmissions as well as connecting to the BTS via the A-bis interface. Through the use of the specific BTS manufacturers' Operation & Maintenance (O&M) commands, the 6113 is able to emulate the Base Station Controller (BSC) and take complete control of the BTS. This is accomplished automatically without the need for user intervention. The A-bis interface also allows the user to make Bit Error Ratio (BER) measurements on both the receiver and transmitter, as specified in GSM rec 11-20/11-21. The 6113 A-bis interface also permits a wide variety of other test functions to be performed that could not otherwise be done.

The A-bis interface of the 6113 supports a bi-directional communications and control link at either 2.048 Mbit/s (CEPT standard) or 1.544 Mbit/s (US T1) standard. With one traffic channel and two signaling channels of either 16 or 64 kbit/s, the 6113 accommodates the fact that the mapping of traffic and signaling channels are manufacturer specific.



CODE DOWNLOAD

Code download of the manufacturer specific application files to the BTS is another important feature of the 6113. This allows a BTS that may not already be connected to a BSC to be tested with the same code that will be used during normal operation, i.e. "real environment" testing.

CONFIGURATION

Configuration of the BTS can be performed by the 6113 allowing the user to place the BTS in a state ready for testing. During testing, the 6113 can control the important parameters of the BTS including; channel number, timeslot, output power of the transmitter, receiver diversity and the transceiver unit under test.

In addition, the 6113 extracts the BTS measurement reports (RX LEV, RX QUAL) for the channel under test, from the A-bis interface and reports them to the user continuously throughout the testing process. The 6113 also displays error or fault reports that the BTS produces on the A-bis interface.

Parameter	Value	Default	
FER Limit	0.100	0.100	%
Class I/II Limit	0.400	0.400	%
Class II Limit	2.000	2.000	%
Expected Power Level	0.0	0.0	dBm
Power Level Limit (+/-)	+6.0	+6.0	dB
Frequency Error Limit (+/-)	48.00	48.00	Hz
RMS Phase Error Limit	5.00	5.00	deg
Peak Phase Error Limit	20.00	20.00	deg
Power Profile Mask Checking	Off	Off	
Mod Spectrum Mask Checking	Off	Off	
Power Tracking	On	On	
Display Holding	Off	Off	

Simple and comprehensive parameter menus

RF INTERFACE

The 6113 can be configured to support GSM850, GSM900, GSM1800 or GSM1900. The 6113 has two separate RF ports for simplex connection to the BTS Receiver and Transmitter. In addition to this the RF IN port can be configured to operate as a duplex connection, thus allowing the testing of micro base stations.

All the necessary protocols for signaling and control of the BTS are provided in the 6113. Encryption (ciphering) is also available, export license requirements permitting. A5/1, A5/2 and A5/3 algorithms are supported.

TEST MODES

A variety of test modes is available. The single test and test sequence modes allow controlled, repeatable testing for production and field use, with user definable pass/fail limits. The multi-mode feature allows all measurements to be performed simultaneously in real time, which aids fault diagnosis and isolation of intermittent problems. Whichever mode is used, the 6113 provides the user with a comprehensive range of tests to measure the performance and functionality of the complete BTS. Wherever possible all of the tests performed are in line with the requirements of the GSM rec. 05-05 and 11-20/11-21.

The 6113 has been designed for operation by both very experienced and semi-skilled users alike. The experienced user has a great degree of flexibility in setting up and testing BTSs. The less experienced

user can use the test sequences for quick set up of the 6113 and repeatable, error free testing.

Ease of use is further facilitated by the use of the soft keys, a spin wheel and a numeric keypad along with a simple, logical menu structure.

PARAMETER SETTINGS

Parameter settings for all the necessary testing variants are accessible for the experienced user. For the less experienced user a suggested default value, based on GSM recommendations, is available. The 6113 has a further ability to store all of the set-up variables in a "parameter file" which can be used to recall settings before testing begins.

SINGLE TEST MODE

Single Test mode allows the user to individually select from a wide range of tests. A full range of settings is available for the user to specify including overall PASS/FAIL criteria. The test is then run with a full set of results returned including the PASS/FAIL indication.

TEST SEQUENCE MODE

Test Sequence mode allows the user to run a complete sequence of single tests using only one or two keystrokes, allowing controlled and repeatable testing.



6113 Digital Radio Test Set

New test sequences can also be generated very quickly from the front panel using a special learning facility and stored on the memory card. Full control over which tests are selected is left to the programmer. Further editing of the test sequences can be accomplished on a PC using a text editor.

MULTIMODE OPERATION

Multimode operation is an ideal tool for fault finding and isolation of intermittent faults. It provides continuously updated numeric and graphic displays of all the key transmitter and receiver measurements. The graphs and graduated bar-charts aid fault diagnosis and adjustment by giving the user recognizable 'pictures' of the performance of the BTS under test as it happens.

As an aid to the operator, the normal GSM test limits are marked on the bar-graphs. If a reading exceeds these limits, the bar itself turns solid black making a potential fault easily recognized.

While in Multimode, most parameters such as channel, slot number, BTS power and RF level are easily changed. Any control commands necessary to perform the change are automatically generated making the 6113 very intuitive to operate.

ADDITIONAL FACILITIES
INSTRUMENT CONTROL

The instrument is capable of being controlled either from the front panel keyboard or remotely via IEEE488 GPIB interface. This allows the test set to be included as part of a larger automatic test system. Whichever control method is used, particular attention has been paid to ease and speed of use.

MEMORY CARDS

The PC memory cards and hard disks provide the user with the ability to store and recall a number of instrument set-ups, test sequences and configuration files for carrying out various tests on differing BTS types. New test sequences can be generated from the front panel using a special learning facility and then stored on the memory card. In this way tests can be selected, limits and parameters changed, and printing controlled, guaranteeing total control and repeatability of testing.



6113 Digital Radio Test Set can be easily carried to remote sites

The PCMCIA version 2 industry standard card and DOS formatting allows direct transfer of files to a suitable PC. Two sockets are provided so that files are easily duplicated and test sequence files can be conveniently separated from results and parameter files.

SYNCHRONIZATION OUTPUT

A programmable synchronization output allows external equipment such as a spectrum analyzer or a logic analyzer to be triggered at any point in the GSM frame. Using this trigger signal, spurious signals can be monitored either out-of-band or during the unused slots.


OPTIONS

The 6113 in its basic form is a complete integrated test set capable of performing the full range of measurements on a GSM Base Station. To complement this, Aeroflex can supply a range of options and accessories, which significantly enhance the applications of the 6113. A full list is provided on the back page along with ordering informa-

tion.

FREQUENCY STANDARDS

Under normal circumstances the supplied frequency standard is more than adequate, however, in a laboratory or production situation, a higher performance may be required. The current version of the internal standard can achieve a stability of 0.03 ppm per year.

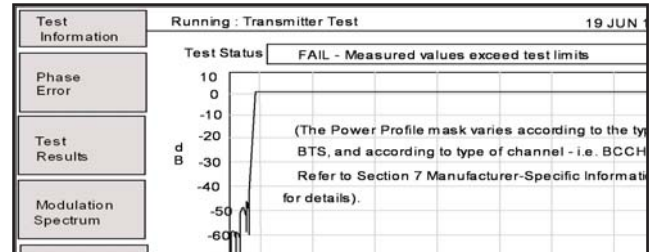

Supplied Option 04F

Frequency	10 MHz	10 MHz
Stability*:	$\pm 1 \times 10^{-7}/\text{year}$	$\pm 3 \times 10^{-8}/\text{year}$
0° to 50°C:	$< \pm 1.7 \times 10^{-8}$	$< \pm 1 \times 10^{-8}$
Warm up time:	30 minutes	30 minutes

*Ageing after 30 days of continuous operation

TRANSMITTER MONITORING

This allows a user, independent of BTS type or manufacturer, to passively monitor the RF characteristics of any Transmitter (Tx) active in the base station. This is accomplished by using the monitor ports on the BTS to gain access to the wanted signal and the base station's broadcast control channel (BCCH). In this mode the user has the option of either entering the channel number, where known, or using the 6113's unique scanning feature to locate the CCH and any associated traffic channels. Once located, the 6113 will automatically lock on and decode it. The 6113 will then non-intrusively monitor all of the following parameters on any selected channel and time slot.

- Transmitter power and power profile
- RMS phase error
- Peak phase error
- Frequency error (Relative to the 6113 time base)
- Modulation spectrum

The measurements are displayed as precise numerical readings along with easy to read bar graphs. Exceeding the recommended limits causes the bar to change color, quickly high-lighting a possible fault condition.

FULL CALL SET UP, RECEIVER SENSITIVITY MEASUREMENT

Once the performance of the transmitters has been verified, the next logical step is to check the operation of the receivers. As with any digital receiver testing, this is accomplished with a bit error ratio (BER) measurement.

Using the call set-up facilities of the 6113 a call is established using a normal network SIM. Once a traffic channel has been assigned, the instrument can then inject a variety of test patterns. Using the high impedance A-bis input, the entire receiver traffic is monitored and

the test pattern automatically located. Once synchronized, a continuous BER reading is available. The signal level seen by the receiver can then be varied manually or automatically to determine the sensitivity.

For more detailed information there is also available a separate menu displaying the FER, Class Ib and Class II Minimum, Maximum and Mean BER readings.

EDGE (OPTION 440)

Option 440 adds the ability to test EDGE enabled base stations.

In addition to the current GSM channel types, the following (E)GPRS channel types are also supported:

- CS-1 to CS-4 (GMSK)
- MCS-1 to MCS-4 (GMSK)
- MCS-5 to MCS-9 (8PSK)

For full details, please refer to the separate 6113 EDGE product information sheet.

SPECIFICATION

TEST CAPABILITY

Transmitter Tests

Cell Control Channel
Generation
Bit Error Ratio
Phase/Frequency Error
Power Level/Steps
Power Profile
Modulation Spectrum

Receiver Tests

Traffic Channel Bit Error Ratio
Traffic Channel Absolute
Sensitivity
RACH Frame Erasure Rate
RX Level
RX Quality

A-bis Function Test

Link Test

SIGNAL SOURCE

FREQUENCY

Range

890 to 915 MHz (GSM900)
1710 to 1785 MHz (GSM1800)

Resolution

1850 to 1910 MHz (GSM1900)
1 Hz

LEVEL

Range

-40 dBm to -120 dBm into 50 Ω (Simplex mode)
-47dBm to -120 dBm into 50 Ω (Duplex mode)

Resolution

0.1 dB

Accuracy

± 1.5 dB GSM900(>-110 dBm) (Simplex)
 ± 1.8 dB GSM1800 (>110 dBm)
 ± 1.8 dB GSM1900 (>-110 dBm)

Accuracy

± 1.5 dB GSM900(>-110 dBm)¹ (Duplex)
 ± 1.8 dB GSM1800 (>-110 dBm)²
 ± 1.8 dB GSM1900 (<-110 dBm)²

RF OUT CONNECTOR

Impedance

50 Ω Nominal

VSWR

$\leq 1.2:1$

Connector

TNC female

RF IN/DUPLEX CONNECTOR

Impedance

50 Ω Nominal

VSWR

$\leq 1.2:1$

Connector

N Type female

MEASURING RECEIVER

Frequency Range

935 to 960 MHz (GSM900)
1805 to 1880 MHz (GSM1800)²
1930 to 1990 MHz (GSM 1900)

Level Range

+46 dBm to -1 dBm

Max Power

50 Ω (+47 dBm) continuous

A-BIS INTERFACE

Format

2.048 Mbit/s or 1.544 Mbit/s supporting
32 or 24 x 64 kbit/s time slots

Connectors

Switchable BNC unbalanced and 4 mm Banana balanced

Traffic

Single 16 kbit/s bi-directional Channel

Signaling

Two 16 or 64 kbit/s bi-directional Links

Impedance

E1 (option 52) either 75 Ω BNC or 120

Ω 4 mm banana T1 (option 51) 100 Ω BNC or 4 mm banana

MEASUREMENTS

PHASE ERROR

Range

10° RMS, $\pm 30^\circ$ peak

Accuracy RMS

<0.3° at 5° phase error

Accuracy Peak

$\pm 7.2^\circ$

FREQUENCY ERROR

Range

± 2.5 kHz

Accuracy

4.5 Hz + freq. std³.

POWER LEVEL

Range

± 46 dBm to -1 dBm

Absolute Accuracy

± 1.0 dB (GSM900)

± 1.0 dB (GSM1800, =20W)

± 1.2 dB (GSM1900, =20W)

Relative Accuracy

< ± 0.4 dB

POWER PROFILE

Dynamic Range

> 48 dB²

MODULATION SPECTRUM

Dynamic Range

> 52 dB³

Frequency Span

1 MHz

FREQUENCY STANDARD

Internal

$\pm 1.2 \times 10^{-7}$ (standard)⁴

(1 Year, all sources of error) $\pm 3.5 \times 10^{-8}$ (Option 04F)⁴

External frequencies:

10 MHz or 13 MHz ± 2.5 ppm-2 dBm to +19 dBm into 50 Ω

Reference Output:

10 MHz or 13 MHz +9 dBm nominal into 50 Ω

INTERFACES

Memory Card

2 Sockets, PCMCIA V2.0

Card Size

Type1, 2 or 3

Card Types supported

SRAM, ATA Flash EEPROM And hard discs

Synchronization Output

For synchronizing external equipment such as a spectrum analyzer

GPIB:

ANSI/IEEE 488.2 - 1987

Compatibility Subset

SH1, AH1, T5, L4, SR1, RL1 PPO, DC1, DTO, CO, E1

RS232 Interfaces

2 configurable ports for printing and Control 9 way male D-Type

Parallel Printer

25 way female D-Type

BTS MANUFACTURERS SUPPORTED

Alcatel

Ericsson

Nokia

Nortel

Siemens

GENERAL

Voltage Ranges

85 to 13V and 180 to 264V AC

Frequency Range

45 to 66 Hz

Power Consumption

170 VA maximum

DIMENSIONS AND ENVIRONMENT

Height

210 mm

Width

350 mm

Depth

420 mm

Weight

14 kg approx

Operating Temperature

0 to 50°C

Calibration Period

1 year

EMC

Complies with

BS EN50081-1 (emissions)

BS EN50082-1 (immunity)

Safety

Complies with BS EN61010-1

UPDATE PROGRAMS

Aeroflex offers a software maintenance and enhancement program. This means that as new BTS software versions are released the test capability of the 6113 can be updated in line with any changes. Adding new BTS software versions or updating existing software features of the 6113 can be performed quickly and easily in the field via memory card, IEEE488 or RS232 interface.

Aeroflex has a policy of continuous improvements which means that specifications will change. For full details of 6113 capabilities and BTS support options, contact your local Aeroflex office.

VERSIONS AND ACCESSORIES

When ordering please quote the full ordering number information.

ORDERING INFORMATION

Model 6113	BTS Test Set
Model 6113E	BTS Test Set with encryption, option 10R
Option 01	GSM900 operation*
Option 02	GSM1800 operation*
Option 03	GSM1900 operation*
Option 04F	Very High Stability Frequency Standard
Option 08	GSM 850 Operation
Option 10R	Encryption retrofit kit
Option 51	T1 A-bis Interface‡
Option 52	E1 A-bis Interface‡
Option 60	Rack Mounting
Option 61	Padded Carrying Bag
Option 62	Rigid Transit Case
Option 64	Front Panel Protection Cover
Option 70	GSM/DCS1800/PCS1800 test SIM for test set
Option 71	Miniature SIM adaptor for test set
Option 79	Removable Hard Disk Drive 1 Gb
Option 90	Test Set/PC RS232 download cable, (9 way D-type)
Option 91	Test Set/Printer RS232 cable (25 way D-type)
Option 92	Test Set/Printer parallel cable

*A least one of the option 01,02,03 must be ordered with the basic model and options 02 and 03 cannot be installed together.

‡At least one of option 51 or 52 must be ordered with the basic model

MANUFACTURER SPECIFIC SOFTWARE

Option 220	Ericsson Software
Option 235	Siemens Software
Option 250	Nortel Software
Option 270	Nokia Software
Option 275	Alcatel Software
Option 300	AIME Software - Air Interface Monitor and Emulator Software

SUPPORT OPTIONS

A number of support options are available that ensure equipment is kept up to date and calibrated. Software support ensures that the latest software is provided. This is important where base station software is revised by the base station manufacturer, and where new features and enhancements are made available.

Extended warranty and calibration is also available. Request Product Support Information data for full details.

Option S1	One year Software Support
Option S2	Two year Software Support
Option S3	Three year Software Support
Option C1	One annual calibration
Option C2	Two annual calibrations
Option E2	One year extended warranty
Option E3	Two year extended warranty
Option W2	One year extended warranty with calibration
Option W3	Two year extended warranty with calibrations

For the very latest specifications visit www.aeroflex.com

CHINA Beijing

Tel: [+86] (10) 6539 1166
Fax: [+86] (10) 6539 1778

CHINA Shanghai

Tel: [+86] (21) 5109 5128
Fax: [+86] (21) 5150 6112

CHINA Shenzhen

Tel: [+86] (755) 3301 9358
Tel: [+86] (755) 3301 9356

FINLAND

Tel: [+358] (9) 2709 5541
Fax: [+358] (9) 804 2441

FRANCE

Tel: [+33] 1 60 79 96 00
Fax: [+33] 1 60 77 69 22

GERMANY

Tel: [+49] 89 99641 0
Fax: [+49] 89 99641 160

HONG KONG

Tel: [+852] 2832 7988
Fax: [+852] 2834 5364

INDIA

Tel: [+91] 80 [4] 115 4501
Fax: [+91] 80 [4] 115 4502

JAPAN

Tel: [+81] (3) 3500 5591
Fax: [+81] (3) 3500 5592

KOREA

Tel: [+82] (2) 3424 2719
Fax: [+82] (2) 3424 8620

SCANDINAVIA

Tel: [+45] 9614 0045
Fax: [+45] 9614 0047

SINGAPORE

Tel: [+65] 6873 0991
Fax: [+65] 6873 0992

UK Stevenage

Tel: [+44] (0) 1438 742200
Fax: [+44] (0) 1438 727601
Freephone: 0800 282388

USA

Tel: [+1] (316) 522 4981
Fax: [+1] (316) 522 1360
Toll Free: 800 835 2352

As we are always seeking to improve our products, the information in this document gives only a general indication of the product capacity, performance and suitability, none of which shall form part of any contract. We reserve the right to make design changes without notice. All trademarks are acknowledged. Parent company Aeroflex, Inc. ©Aeroflex 2011.

www.aeroflex.com
info-test@eroflex.com



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.