

SERIES PCL TERMINATIONS

Cartridge – DC-18 GHz



GENERAL INFORMATION

Aeroflex/KDI Cartridge Terminations are miniature, space saving models with high power capability to 15 watts.

The PCL Series incorporates an alignment slot to assist in accurate positioning when soldering to a stripline or microstrip circuit.

PCL SERIES FEATURES

- Alignment Slot
- Weight less than 2 grams
- Space Saver-Compact size

MATERIALS

Housing: Copper, Nickel Plated per QQ-N-290




Tab: Beryllium Copper, Gold Plated per MIL-G-45204

NOTE

1. VSWR as measured in a 50 ohm stripline circuit.



PERFORMANCE SPECIFICATIONS			
Part Number	Input Frequency Range	Power (Watts)	VSWR (Typical) ⁽¹⁾
PCL3-125-3	DC-18 GHz	3	DC-4 GHz—1.10:1 4-8 GHz—1.20:1 8-12.4 GHz—1.30:1 12.4-18 GHz—1.50:1
PCL15-250-1	DC-12.4 GHz	15	DC-4 GHz—1.10:1 4-8 GHz—1.20:1 8-12.4 GHz—1.30:1

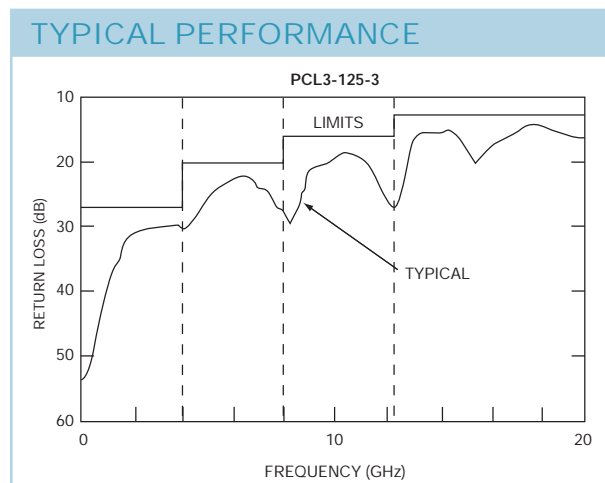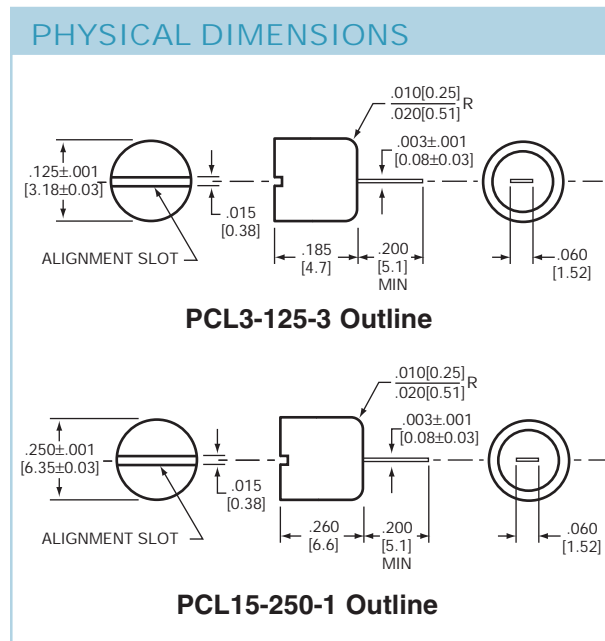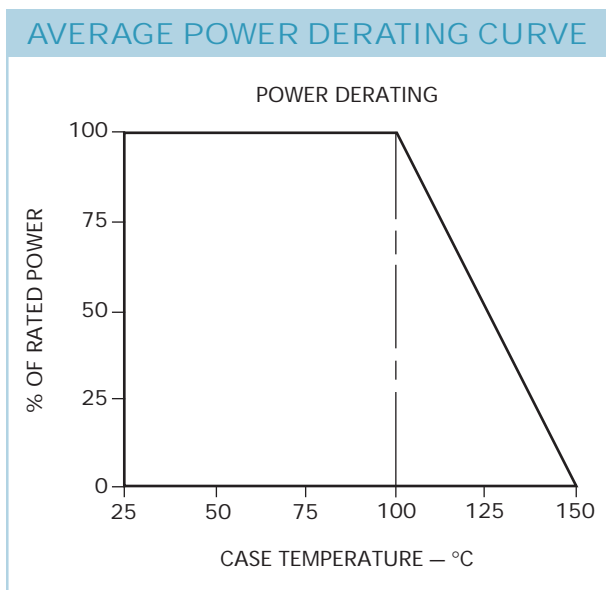

KEY: Inches [Millimeters] .XX ±.03 .XXX ±.010 [X ±0.8 .XX ±0.25]
 60 South Jefferson Road, Whippany, NJ 07981
 Tel: 973-887-8100 • Fax: 973-560-1372
www.aeroflex.com/kdi-resistor • kdi-resistor-sales@eroflex.com

